







② DRT 系列 IGBT 驱动变压器外形图、安装尺寸、线圈图及主要技术参数

DRT801 系列

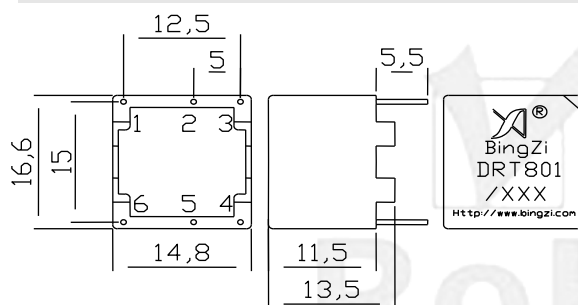

型号	u	V _p (kV)	f _p (kHz)	∫udt (μVs)	V ₁ (V)	t _n (μs)	V ₂ (V)	R _L (Ω)	使用频率 范围	线圈图
DRT801/101A	1:1	3.1	1	≥280	15	19	13	100	100Hz~50kHz	图 1
DRT801/201A	2:1				20	14	9			
DRT801/301A	3:1				30	9	9			
DRT801/111B	1:1:1				15	19	13			图 2
DRT801/211B	2:1:1				20	14	9			
DRT801/311B	3:1:1				30	10	9			

DRT802 系列

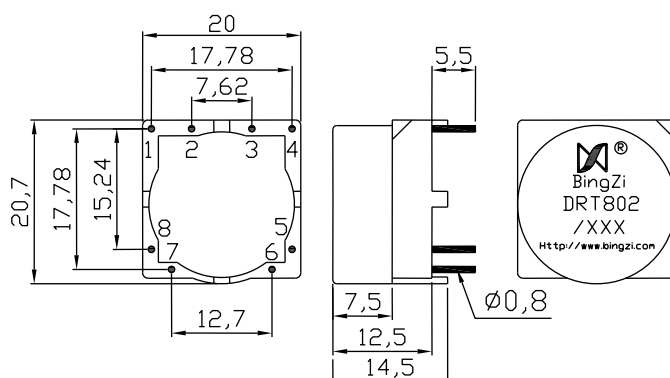

型号	u	V _p (kV)	f _p (kHz)	∫udt (μVs)	V ₁ (V)	t _n (μs)	V ₂ (V)	R _L (Ω)	使用频率 范围	线圈图
DRT802/101A	1:1	3.1	1	≥310	15	21	13	100	100Hz~50kHz	图 3
DRT802/201A	2:1				20	15.5	9			
DRT802/301A	3:1				30	11	9			
DRT802/111B	1:1:1				15	21	13			图 4
DRT802/211B	2:1:1				20	15.5	9			
DRT802/311B	3:1:1				30	11	9			